

2J2124-C315N

CELLULAR / LTE Screw/Connector Mount

Key Features

CELLULAR / LTE

- 698-960 MHz
- 1710-2170 MHz
- 2500-2700 Mhz

Screw/Connector Mount

N-Male Standard

Ground Plane Independent

Dimensions 202 × Ø 20 mm



1. Antenna and electrical specifications

Parameters	CELLULAR / LTE Antenna		
Standards	2G,3G and 4G		
Band (MHz)	700/850/900	1700/1800/1900/2100	2600
Frequency (MHz)	698-960	1710-2170	2500-2700
Return Loss (dB)	~-11.5	~-14.2	~-9.2
VSWR	~1.8:1	~1.5:1	~2.0:1
Efficiency (%)	~55	~58	~71
Peak Gain (dBi)	~-0.3	~-1.7	~-2.3
Average Gain (dB)	~-2.7	~-2.4	~-1.5
Impedance (Ohm)	50		
Polarisation	Linear		
Radiation Pattern	Omni-Directional		
Max. Input Power (W)	25		
Connector Type	N-Male Standard		

Antenna Measurement Conditions:



Free Space



Measured in Certified CTIA 3D Anechoic Chamber



2. Mechanical and environmental specifications

Specifications	2J2124-C315N
Mounting Type	Screw/Connector Mount
Dimensions (mm)	202 × Ø 20
Radome	PC/ABS UV Stable
Radome color	Black or White
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Substance Compliance	RoHS


3. Antenna parameters

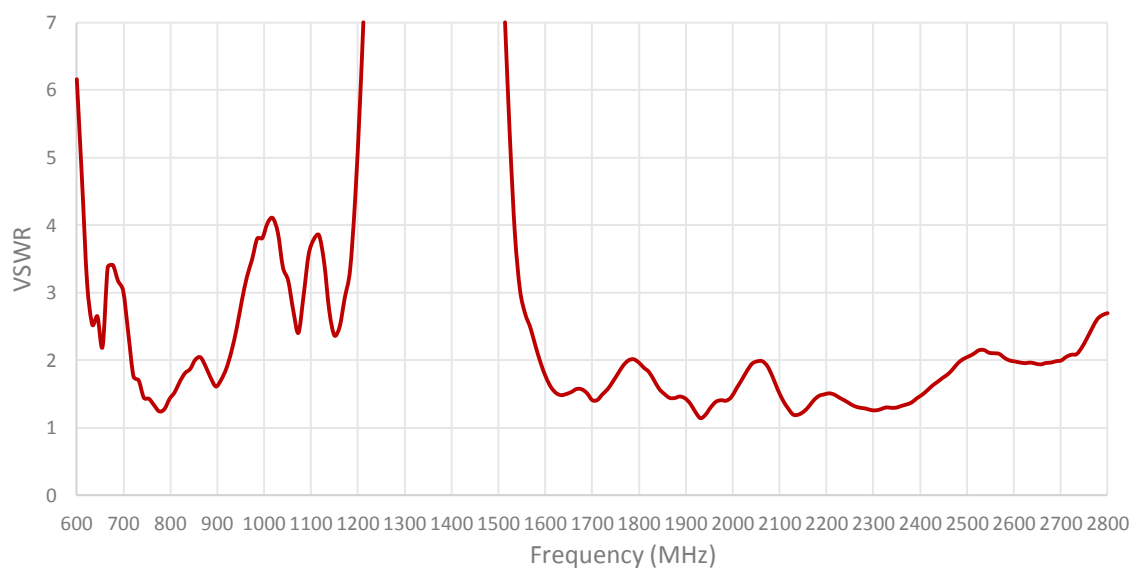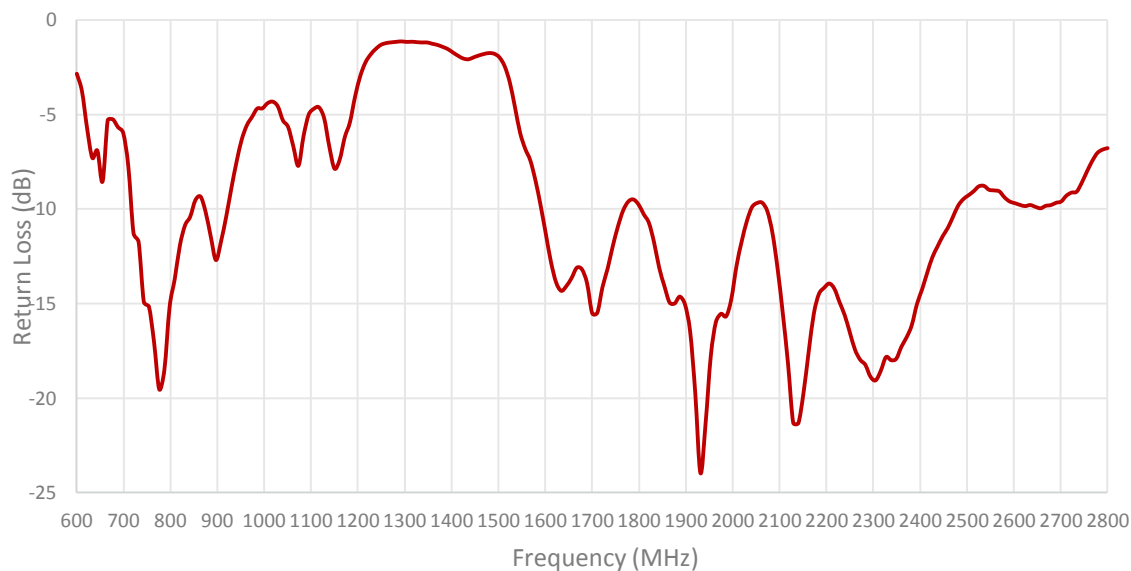

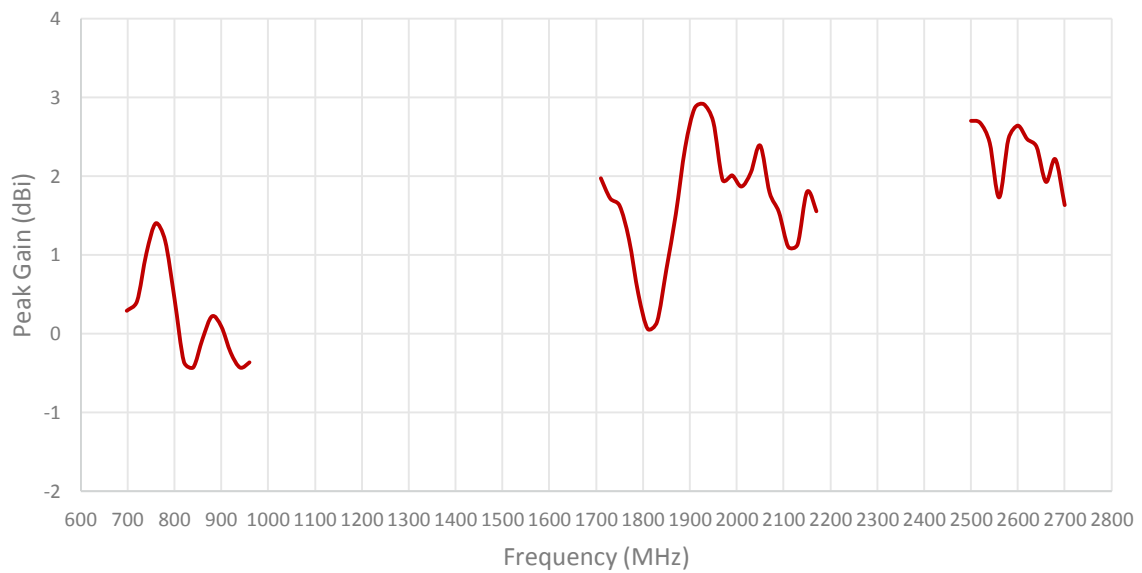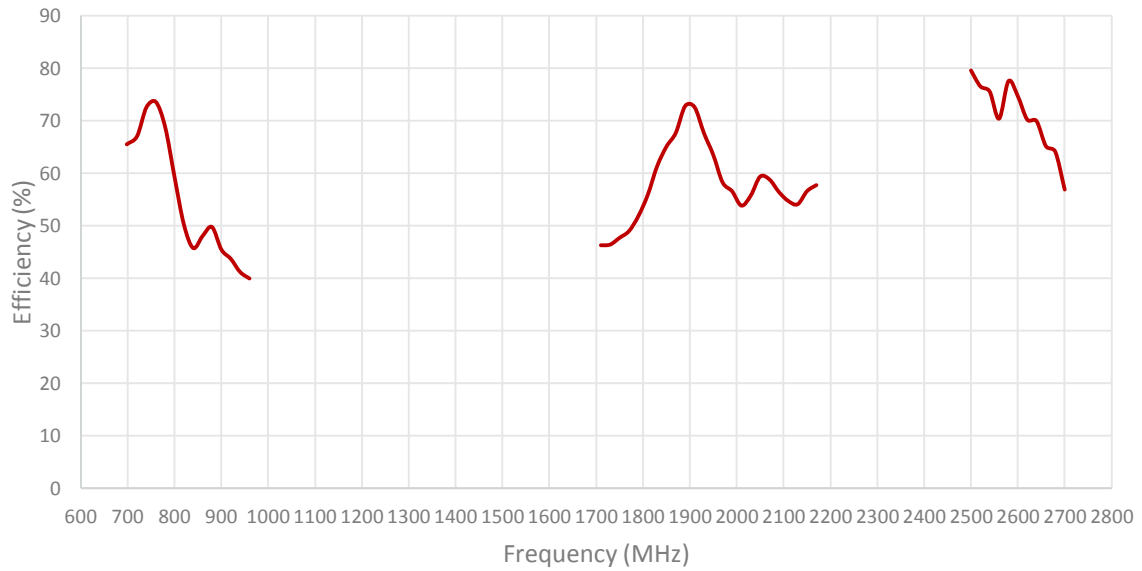


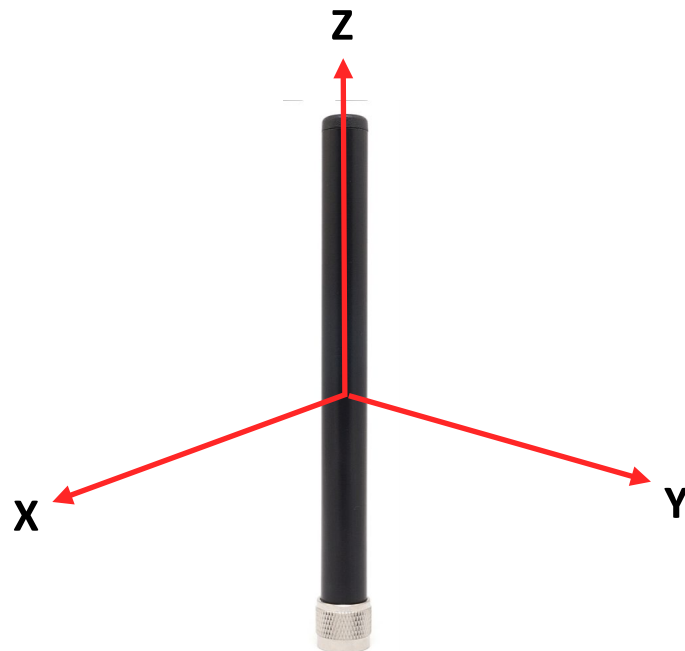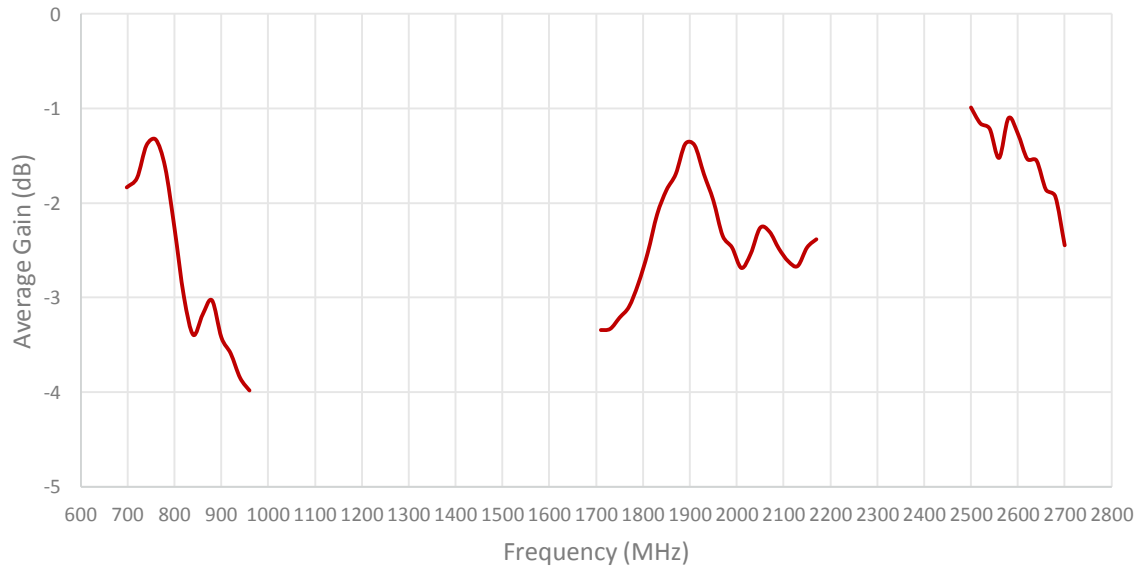


Radiation pattern reference

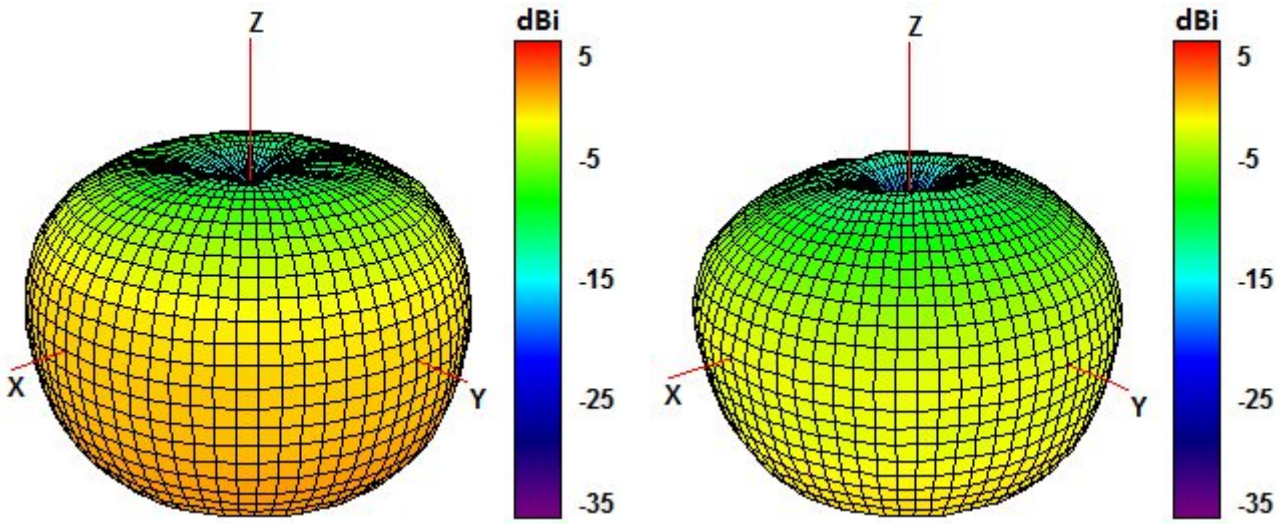


750 and 850 MHz Radiation pattern

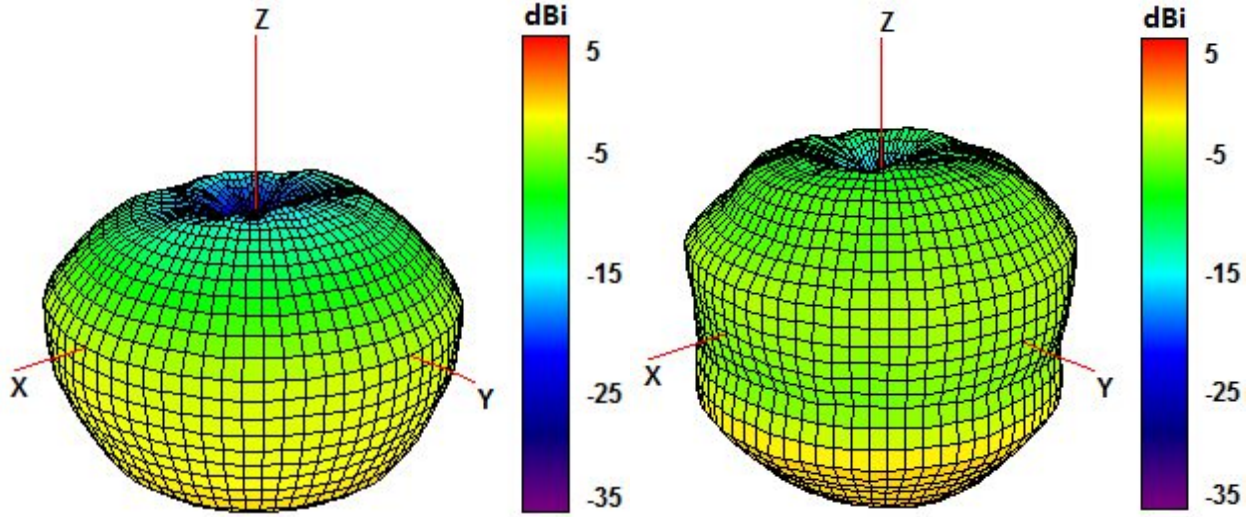

940 and 1750 MHz Radiation pattern

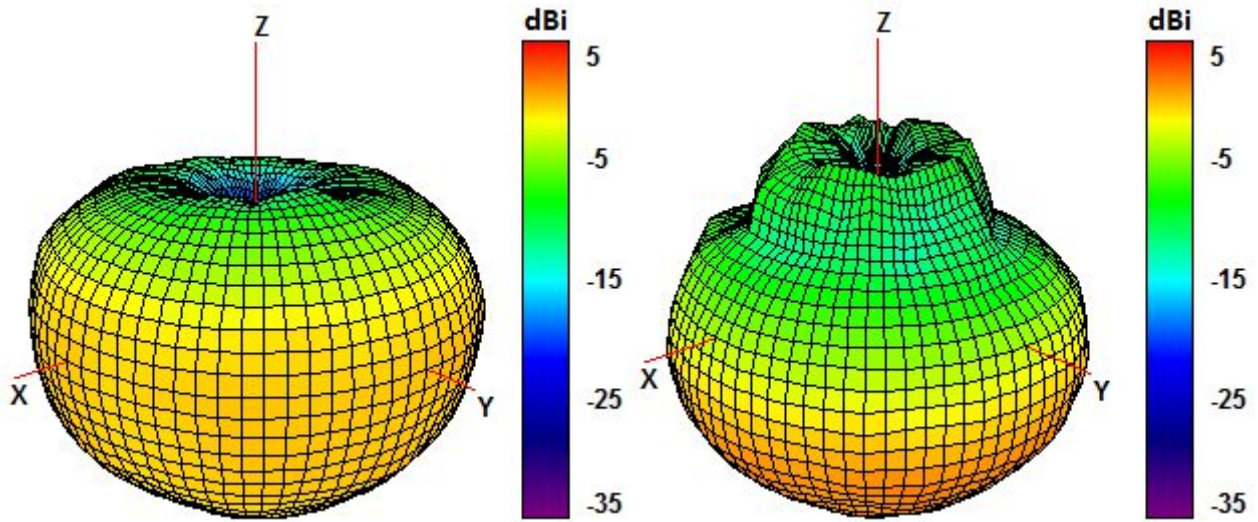


1850 and 1950 MHz Radiation pattern

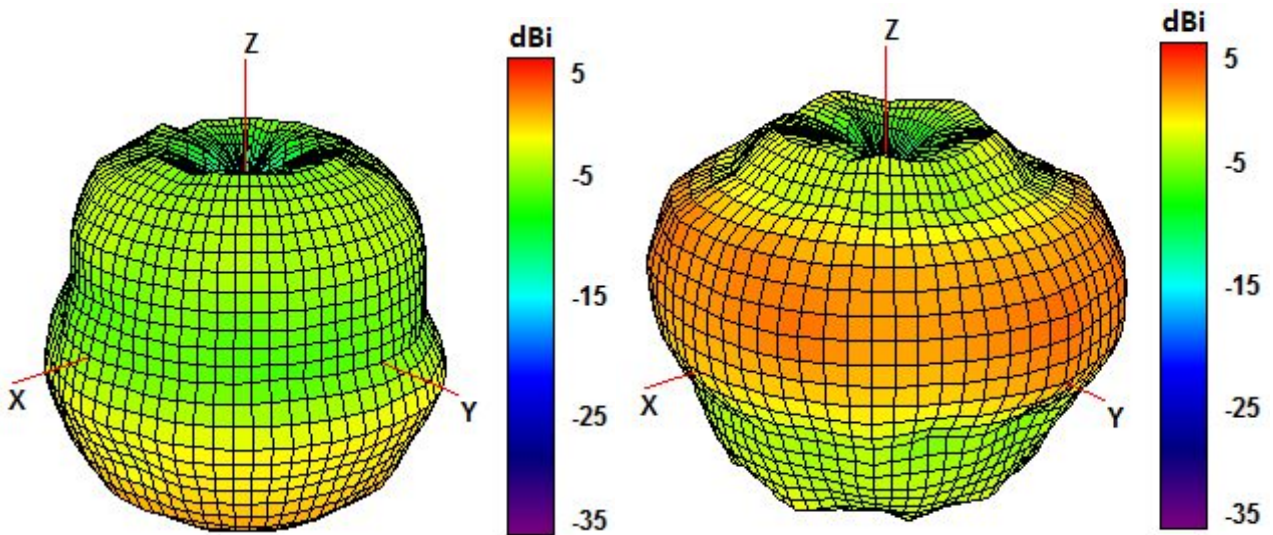

2100 and 2600 MHz Radiation pattern

4. Antenna drawings

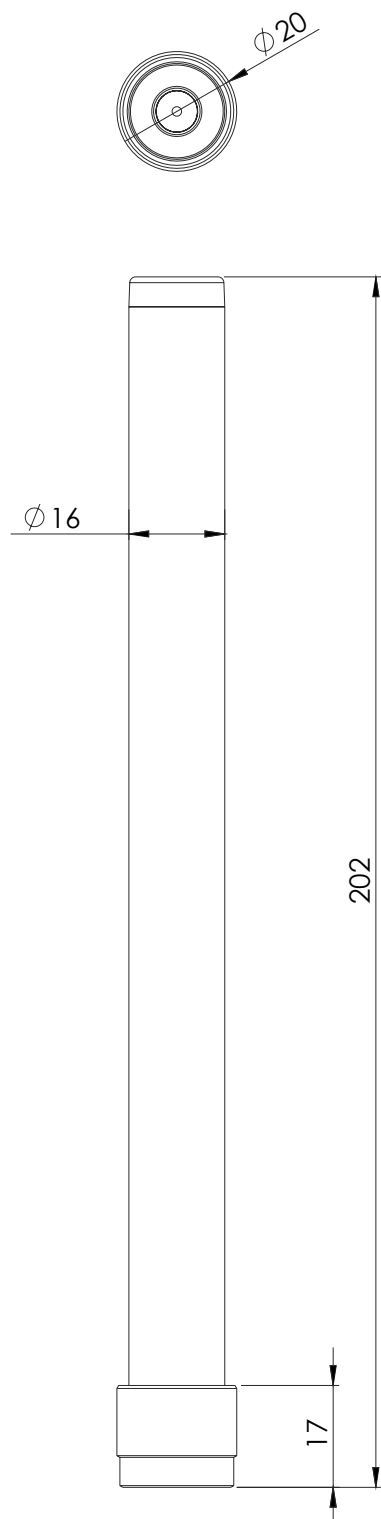

5. Antenna Images

